


COB007	24	10	AA	55	90	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	10: 10mm	27: 2700K 30: 3000K 40: 4000K	55: IP55 (Damp)	90: 90+	5m (SD) 50m (MS) Customized



CCT	Power	Brightness	Luminous Efficacy
2700K	7.3 W/ft	774 lm/ft	106 lm/W
3000K	7.3 W/ft	817 lm/ft	112 lm/W
4000K	7.3 W/ft	860 lm/ft	118 lm/W

Project	
Qty	
Date	
Client	

Standard CCT



2700K 3000K 4000K

Waterproof Solution




IP55

Silicone Coating

Wet location

SMD	SMD2835 white
Input Voltage	24VDC
Beam Angle	140°/120°
CRI	90+
Power	24W/M (7.3W/ft.)
Current	1A/M (0.305A/FT)
Brightness	860lm/ft (@4000K)
Length/Reel	5m(16.4ft)
Cut Length	26.3mm/unit (1.04in/unit)
Max. Length (No Voltage drop)	3.75m
IP Grade	IP55
Operating Temperature	-20°C~45°C
LED CCT & Wavelength	2700K / 3000K / 4000K
Dimming Method	PWM (dimnable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	CE, UL, RoHS



DIMENSION

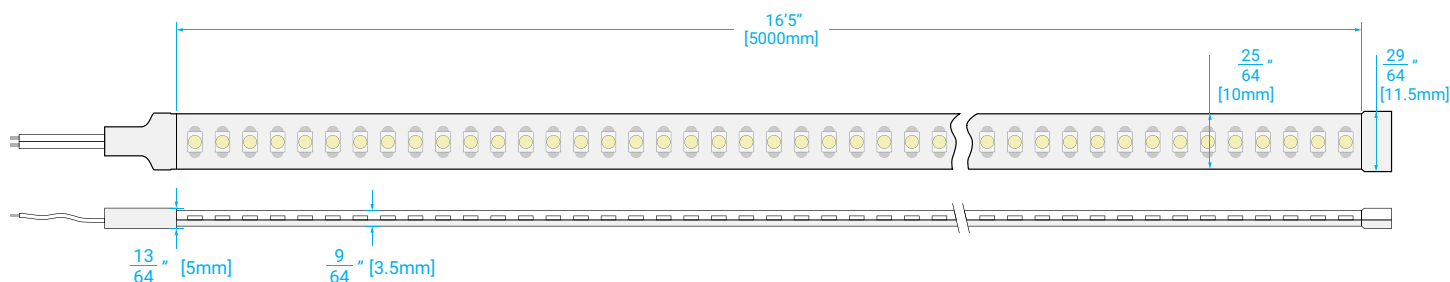

ACCESSORIES

**LC2P-10mmH-IP33**

Solderless 2-pin IP33 connector for 10mm LED strips to 20AWG stranded wire. (SMD LEDs ≥ 120 LEDs/m)

**LL2P-10mmH-IP33**

Solderless 2-pin IP33 connector for 10mm LED strips. (SMD LEDs ≥ 120 LEDs/m)

